



**NEW**



### HOW TO ORDER

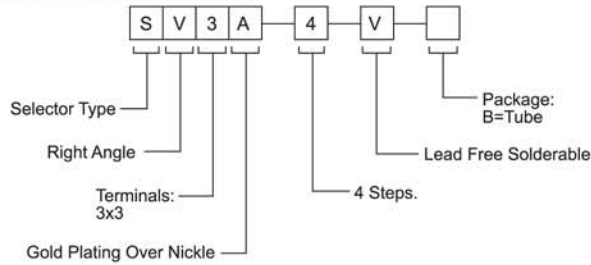

### SPECIFICATION

#### MECHANICAL

Mechanical Life : 20,000 steps  
 Operation Force : 200gf-cm max

#### ENVIRONMENTAL

Operation Temperature Range: -25° C to +80° C  
 Storage Temperature Range: -40° C to +85° C



#### ELECTRICAL

Electrical Life: 20,000 steps  
 Non-Switching Rating: 100mA, 50VDC  
 Switching Rating: 25 mA, 24 VDC

#### PACKAGE


Tube: 80 pcs/tube

### SV3A-4



P.C.B. LAYOUT

ONN				
● OFF				
POSITION	CODE			
	15	30	75	110
15	○	●	●	●
30	●	○	●	●
75	●	●	○	●
110	●	●	●	○

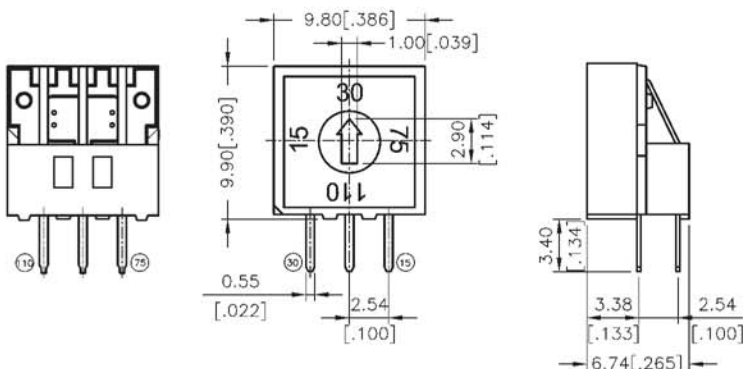

General Tolerance: ±0.2mm( ±0.008")