


SS3 SERIES

Recoil & SMT Type (1P2T)

HOW TO ORDER

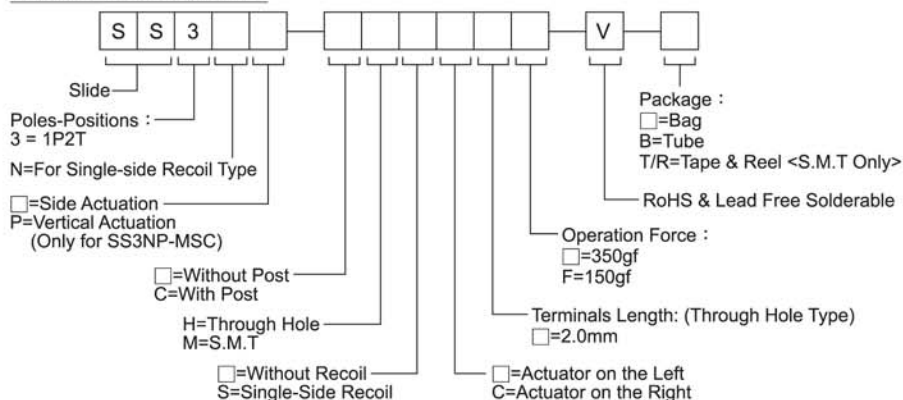

SLIDE SWITCH

SPECIFICATION

MECHANICAL

Mechanical Life: 10,000 cycles
Operation Force: 100gf min, 350gf max
Stroke: 2mm

ENVIRONMENTAL

Operation Temperature Range : -20°C to +70°C
Storage Temperature Range : -40°C to +85°C


ELECTRICAL

Electrical Life: 10,000 cycles
Rating: 25mA, 24 VDC




PACKAGE

2000 pcs/bag
53 pcs/tube
1900 pcs/reel

CIRCUIT






SS3-H

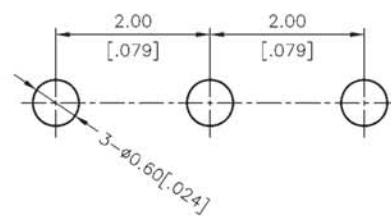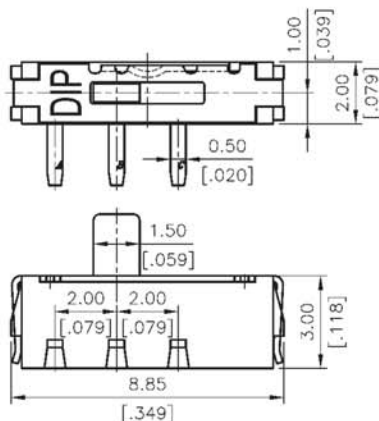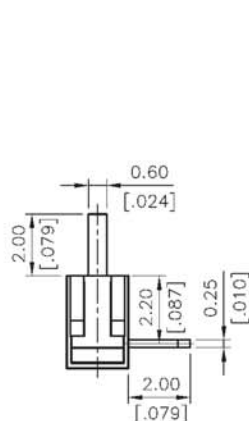

P.C.B. LAYOUT

SS3N-MS

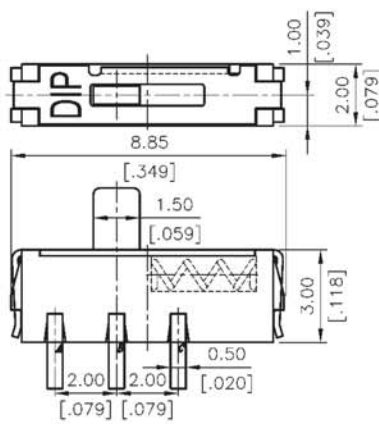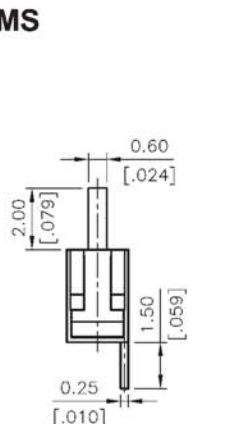

P.C.B. LAYOUT

General Tolerance: $\pm 0.2\text{mm}$ ($\pm 0.008''$)

www.diptronics.nl